

WH600 in HF36
Iridium
SBE37 S/N
Pinger: Voltage:
Swivel

60 95 m 5/16" Amsteel II+

SS-30 #

Aquadopp S/N
SBE37 ODO S/N

72 43 m 5/16" Amsteel II+

SS-30 #


Swivel
Aquadopp S/N
SBE37 ODO S/N

122 01 m 5/16" Amsteel II+

SS-28 #

Aquadopp S/N
SBE37 S/N

189 3 m 5/16" Amsteel II+

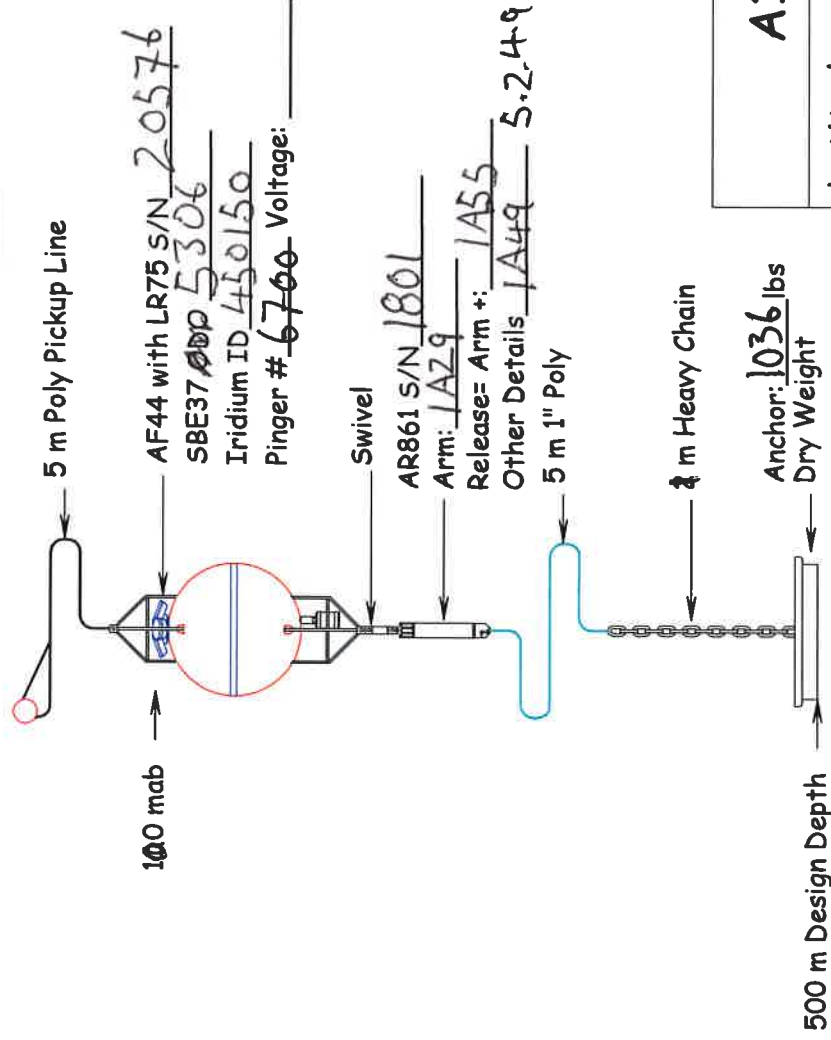

A1-59

Latitude: 45° 32.330

Longitude 126° 11.710

Time: 1626 UTC Date: 31/07/2019

Depth: 485

A1-59 Mooring Configuration
500 m Design Depth

Item	Weight (kg)	Wet Weight (kg)	Length (m)	Inst height (m)	Inst. Depth (m)	Net Weight Below Float (kg)
3/4" Poly Pickup line			5.00	15.44		484.56
1/2" Shackle	0.37	0.32	0.05			
LR75↑ +SBE37 in 45" Float	463.27	-254.00	2.13	10.39		489.61
1/2" Shackle	0.37	0.32	0.05			
1/2" Shackle	0.37	0.32	0.05			
MillerC3	1.23	1.07	0.15			
1/2" Shackle	0.37	0.32	0.05			
5/8" Shackle	0.76	0.67	0.06			
RT 661-B2S	30	12.00	0.90			
1" Shackle	2.57	2.24	0.00			
1" Poly	0	0.00	5.00			
7/8" Shackle	0.37	0.32	0.00			
1" Chain	50	45.00	2.00			

topline w/ 8" float

AF44 w/	WH 75 kHz	s/n	20576
	SBE37	s/n	5396
	pinger	s/n	6700
	beacon	s/n	450150

1/2"
1/2"
swivel

1/2"

5/8"

AR861	s/n	1801	—	1 A 29 Arm
droplink				1 A 29
5m dropline				1 A 55 Rel

1"

anchors 1036lbs