

DEPLOYMENT RECORD

Project Name: AMP 2 Start Date: Apr 2007 End Date: Sept 2007
 Mooring Name: 5065-D Station Name: 5065

Geog. Desc.: Georgia Strait South Tide: Sand Heads + 3.5m
 Latitude: 49° 01' 63.9" N Longitude: 123° 25' 47.4" W
 Water Depth: 304m datum Ice Thickness: _____
 Magnetic decl: _____ Time Zone: PDT Anchor Type: 2 wheels + chain 1707163
 Date: 02/04/2007 Time Anchor Dropped: 1422 PDT Date: _____
 Remarks: 2122 UTC

RECOVERY RECORD

Date: 22/07/2009 Time Anchor Released: 2040 PDT
 Remarks: _____

INSTRUMENTS (Start at TOP)

Type	Serial #	Depth	Time in	Time Out	Notes
Double beam	86090C	50m	1411		PDT
SAE19+	718569	51.6			
FLINTNAT	948				
RCM4	3688	53.2	1413		John Morrison exp.
CRUD	1	73.2			
YSI 6600	02A0729	150.0			
RCM4	7462	291	1416		
Baker	718568	294			Upside Down

Range

Release	Serial	R Code	Arm Code	Freq	On/Off	B0	B1	Aux Codes
AR191	144	B530	B529					
Pinger 1	Type	Serial	Pinger 2	Type	Serial	Battery Volt		
Helle	144 + 27W	1442	0ML	144 + 27W	9714004	18.3	18.7	


FLOTATION

Type	Serial #	Size	Colour
SS30	3016	30	yellow
VINTAB	46	14"	orange
SS30	3001	30	yellow
SS30	3007	30	yellow

Type	Serial #	Size	Colour

time in water UTC 21:08

Novatech VHF: 501-037
Argos Beacon: ID 20920

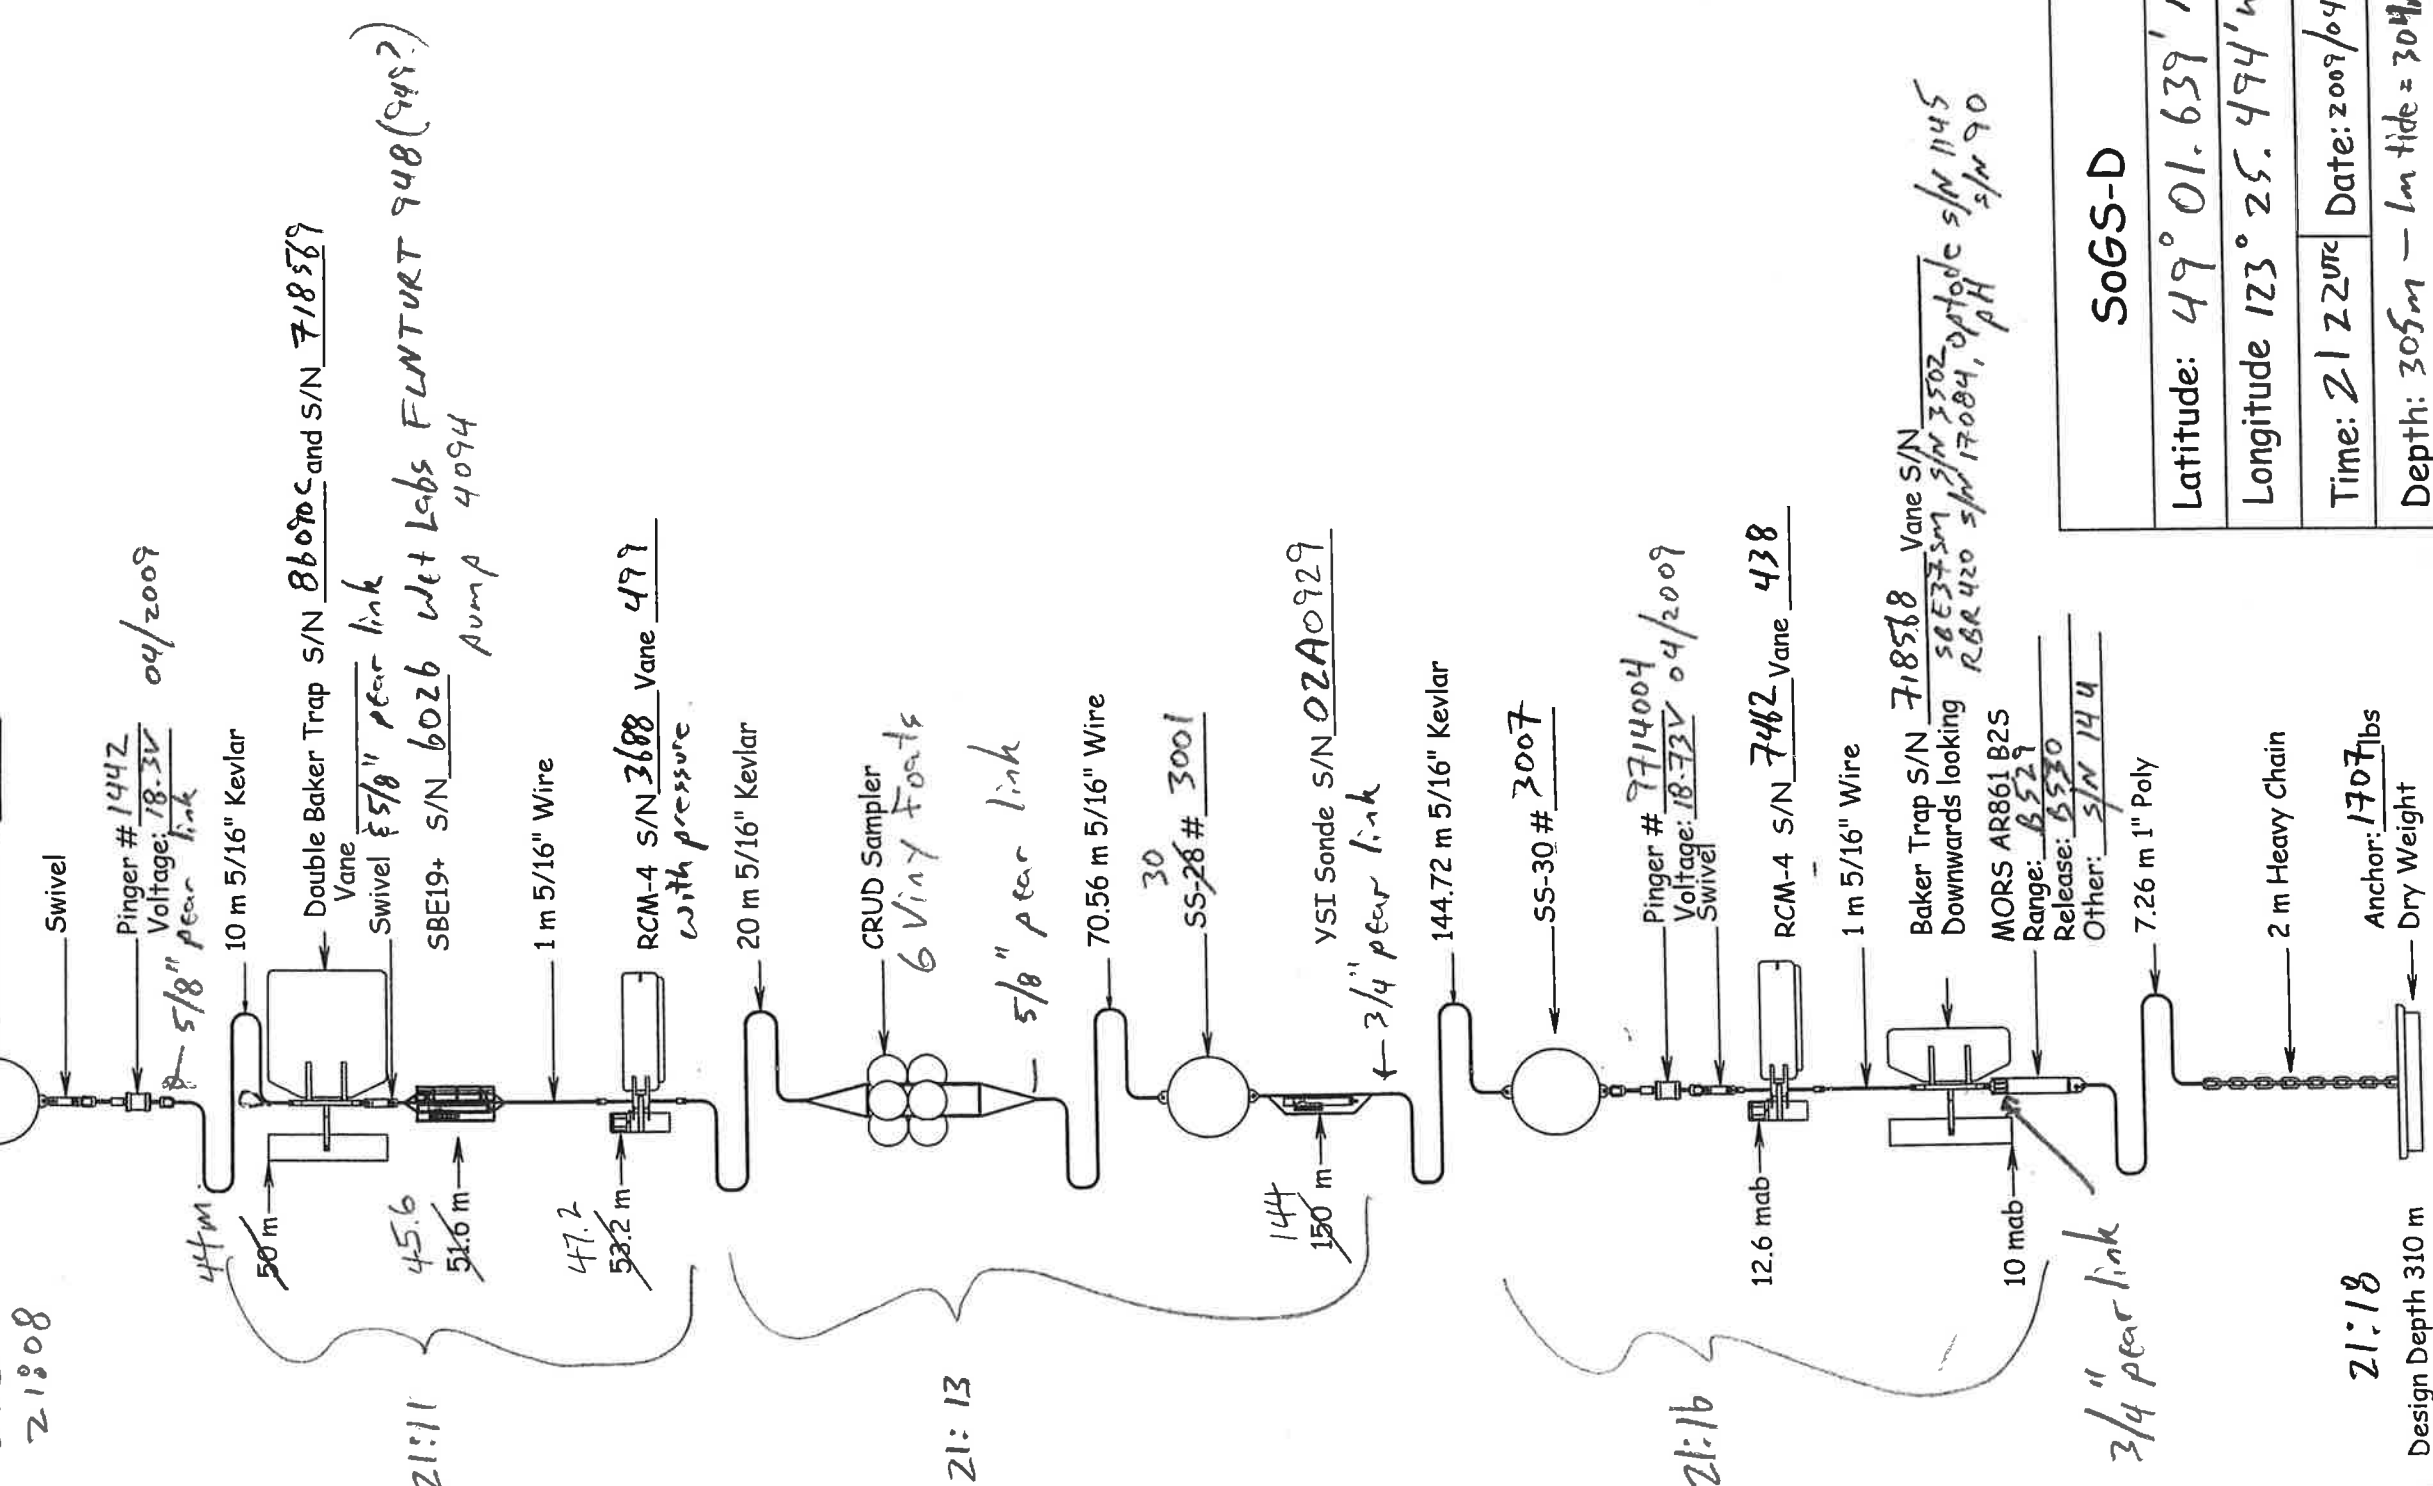

SoGS-D			
Latitude: 49° 01.639' N			
Longitude 123° 25.494' W			
Time: 21 22 UTC		Date: 2009/04/02	
Depth: 305m — 1m tide = 304m			
eads tide = +1m			

	Weight (kg)	Wet Weight (kg)	Length (m)	Inst. Height off btm (m)	Net Weight below float (m)	Depth (m)
3/4" Poly Pickup Line	1.45	-0.19	5.00	277.05		32.95
1/2" Shackle	0.37	0.32	0.05			
SS30 (WHH)	76	-161.00	1.11	272.00	-182.83	38.00
1/2" Shackle	0.37	0.32	0.05			
Pinger		4.10	0.62			
1/2" Shackle	0.37	0.32	0.05			
MillerC3	1.23	1.07	0.15			
1/2" Shackle	0.37	0.32	0.05			
1/2" Sling Link	0.25	0.22	0.08			
1/2" Shackle	0.37	0.32	0.05			
5/16" Kevlar	0.57	0.16	10.00	9.96		
1/2" Shackle	0.37	0.32	0.05			
Double Baker Trap	65	30.00	0.55	260.00		50.00
MillerC3	1.23	1.07	0.15			
1/2" Shackle	0.37	0.32	0.05			
1/2" Shackle	0.37	0.32	0.05			
SBE19+ with frame	18.70	12.25	1.15	258.37		51.63
1/2" Shackle	0.37	0.32	0.05			
5/16" Amgal	1.89	1.65	1.00			
RCM4	26.60	17.30	0.75	256.80		53.20
5/16" Kevlar	1.14	0.32	20.00			
1/2" Shackle	0.37	0.32	0.05			
CRUD Sampler	76	-63.00	3.50	235.00	75.00	74.00
1/2" Shackle	0.37	0.32	0.05			
1/2" Shackle	0.37	0.32	0.05			
5/16" Amgal	17.76	15.54	70.56			
1/2" Shackle	0.37	0.32	0.05			
SS-28	64.00	-133.00	1.11		-37.30	
1/2" Shackle	0.37	0.32	0.05			
Sonde	15.77	13.07	1.00	160.00		150.00
1/2" Shackle	0.37	0.32	0.05			
1/2" Sling Link	0.25	0.22	0.08			
1/2" Shackle	0.37	0.32	0.05			
5/16" Kevlar	8.25	2.31	144.72	144.14 before stretch		
1/2" Shackle	0.37	0.32	0.05			
1/2" Shackle	0.37	0.32	0.05			
SS30 (WHH)	76	-161.00	1.11	14.63	69.40	295.37
1/2" Shackle	0.37	0.32	0.05			
Pinger		4.10	0.62	3.27		
1/2" Shackle	0.37	0.32	0.05			
MillerC3	1.23	1.07	0.15			
1/2" Shackle	0.37	0.32	0.05			
RCM4	26.60	17.30	0.75	12.60		297.40
5/16" Amgal	1.89	1.65	1.00			
1/2" Shackle	0.37	0.32	0.05			
Baker Trap	40	21.00	0.60	10.00		300.00
1/2" Shackle	0.37	0.32	0.05			
5/8" Shackle	0.76	0.67	0.06			
AR861 B2S	30.00	22.00	0.83	10.09		
1" Shackle	2.3	2.01				
1" Poly		-0.20	7.26			
7/8" Shackle	1.8	1.57				
1" Chain	38.64	33.71	2.00			