

DEPLOYMENT RECORD

Project Name: AMP Start Date: End Date:
Mooring Name: SOGS-F Station Name: SOGS

Geog. Desc.: Strait of Georgia Tide: Georgia Pt. +3m
 Latitude: 49° 16.49' N Longitude: 123° 25.488
 Water Depth: 307 m Ice Thickness: _____
 Magnetic decl: _____ Time Zone: UTC Anchor Type: Tram Wed 2070
 Date: Nov 21, 2009 Time Anchor Dropped: 1706 Date: _____
 Remarks: _____

RECOVERY RECORD

Date: April 5, 2010 Time Anchor Released: 0919 PDT
Remarks:

INSTRUMENTS (Start at TOP)


[illegible]

Release	Serial	Re Code	Range Code	Freq	On/Off	B0	B1	Aux Codes
AK191	189	B538	B537					
Pinger 1	Type	Serial	Pinger 2	Type	Serial	Battery Volt		

FLotation.

Type	Serial #	Size	Colour
S830	3016	30	Yellow
S530	1000	30	
SB30	3001	30	
			-

Data Entry by:

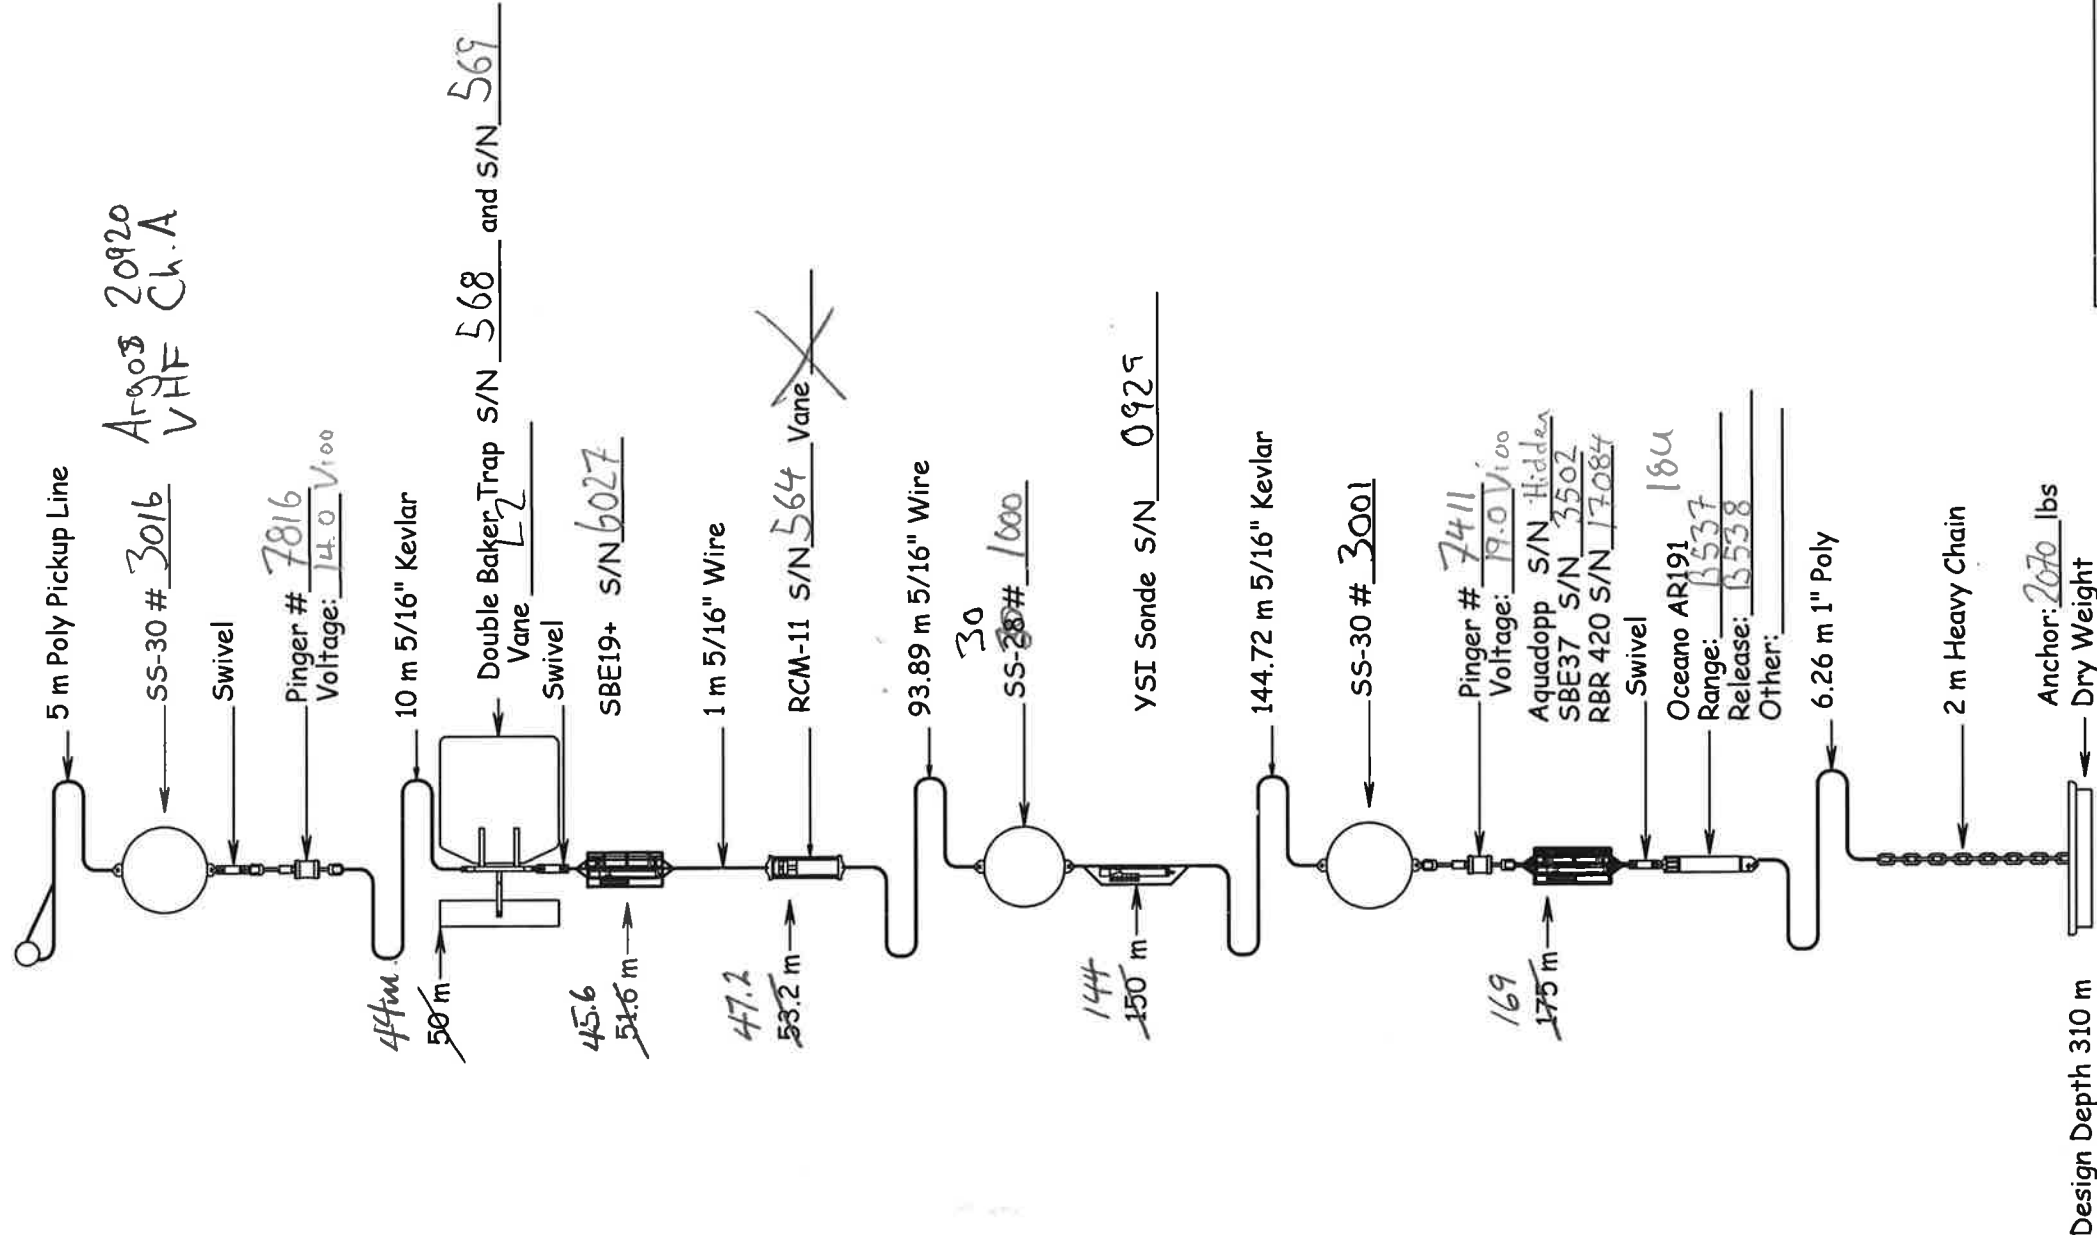

307 - 3 tide = 304 datum

SoGS-F

Latitude: 49° 1.649' N

Longitude 123° 25.488' W

Time: 1706 UTC

Date: 02/11/2009

Depth: 307 m

SOG S-F Deck Chert

5 m poly line 1/2 d

VHF Ch A

Argos 209200

SB30 3016 1/2 d 1/2 d Swivel 1/2 d

Pinger 7816 140 V₁₀₀ 1/2 d 5/8 Sling

7/16 d

10 m 1/4" Kevlar 1/2 ss 1/2 ss

Noble Baker 568 d 569

Swivel 1/2 d 1/2 d

SBE 19 6027 1/2 ss 1/2 d

1 m 5/16 1/2 ss 1/2 ss

ECMN 564 1/2 ss 7/16 s

9 3.89 m 1/4 wire

SSS30 1000 1/2 d 1/2 d Swivel 1/2 d 1/2 d

Sonde 0929 1/2 d 1/2 d

144.1 m 1/4" Kevlar 1/2 d 1/2 d

SB30 3001 1/2 d

Pinger 7411 19.0 V₁₀₀ 1/2 d

237 m 5/16" Wire 1/2 d

RBR 17084

SBE 37 3502


Aquaprop 5871

1/2 d 1/2 d Swivel 5/8 d 1" d

AR 191 184 Range B537 Release B538

6.34 m 1" Poly 1 d 20

2070 to Anchor

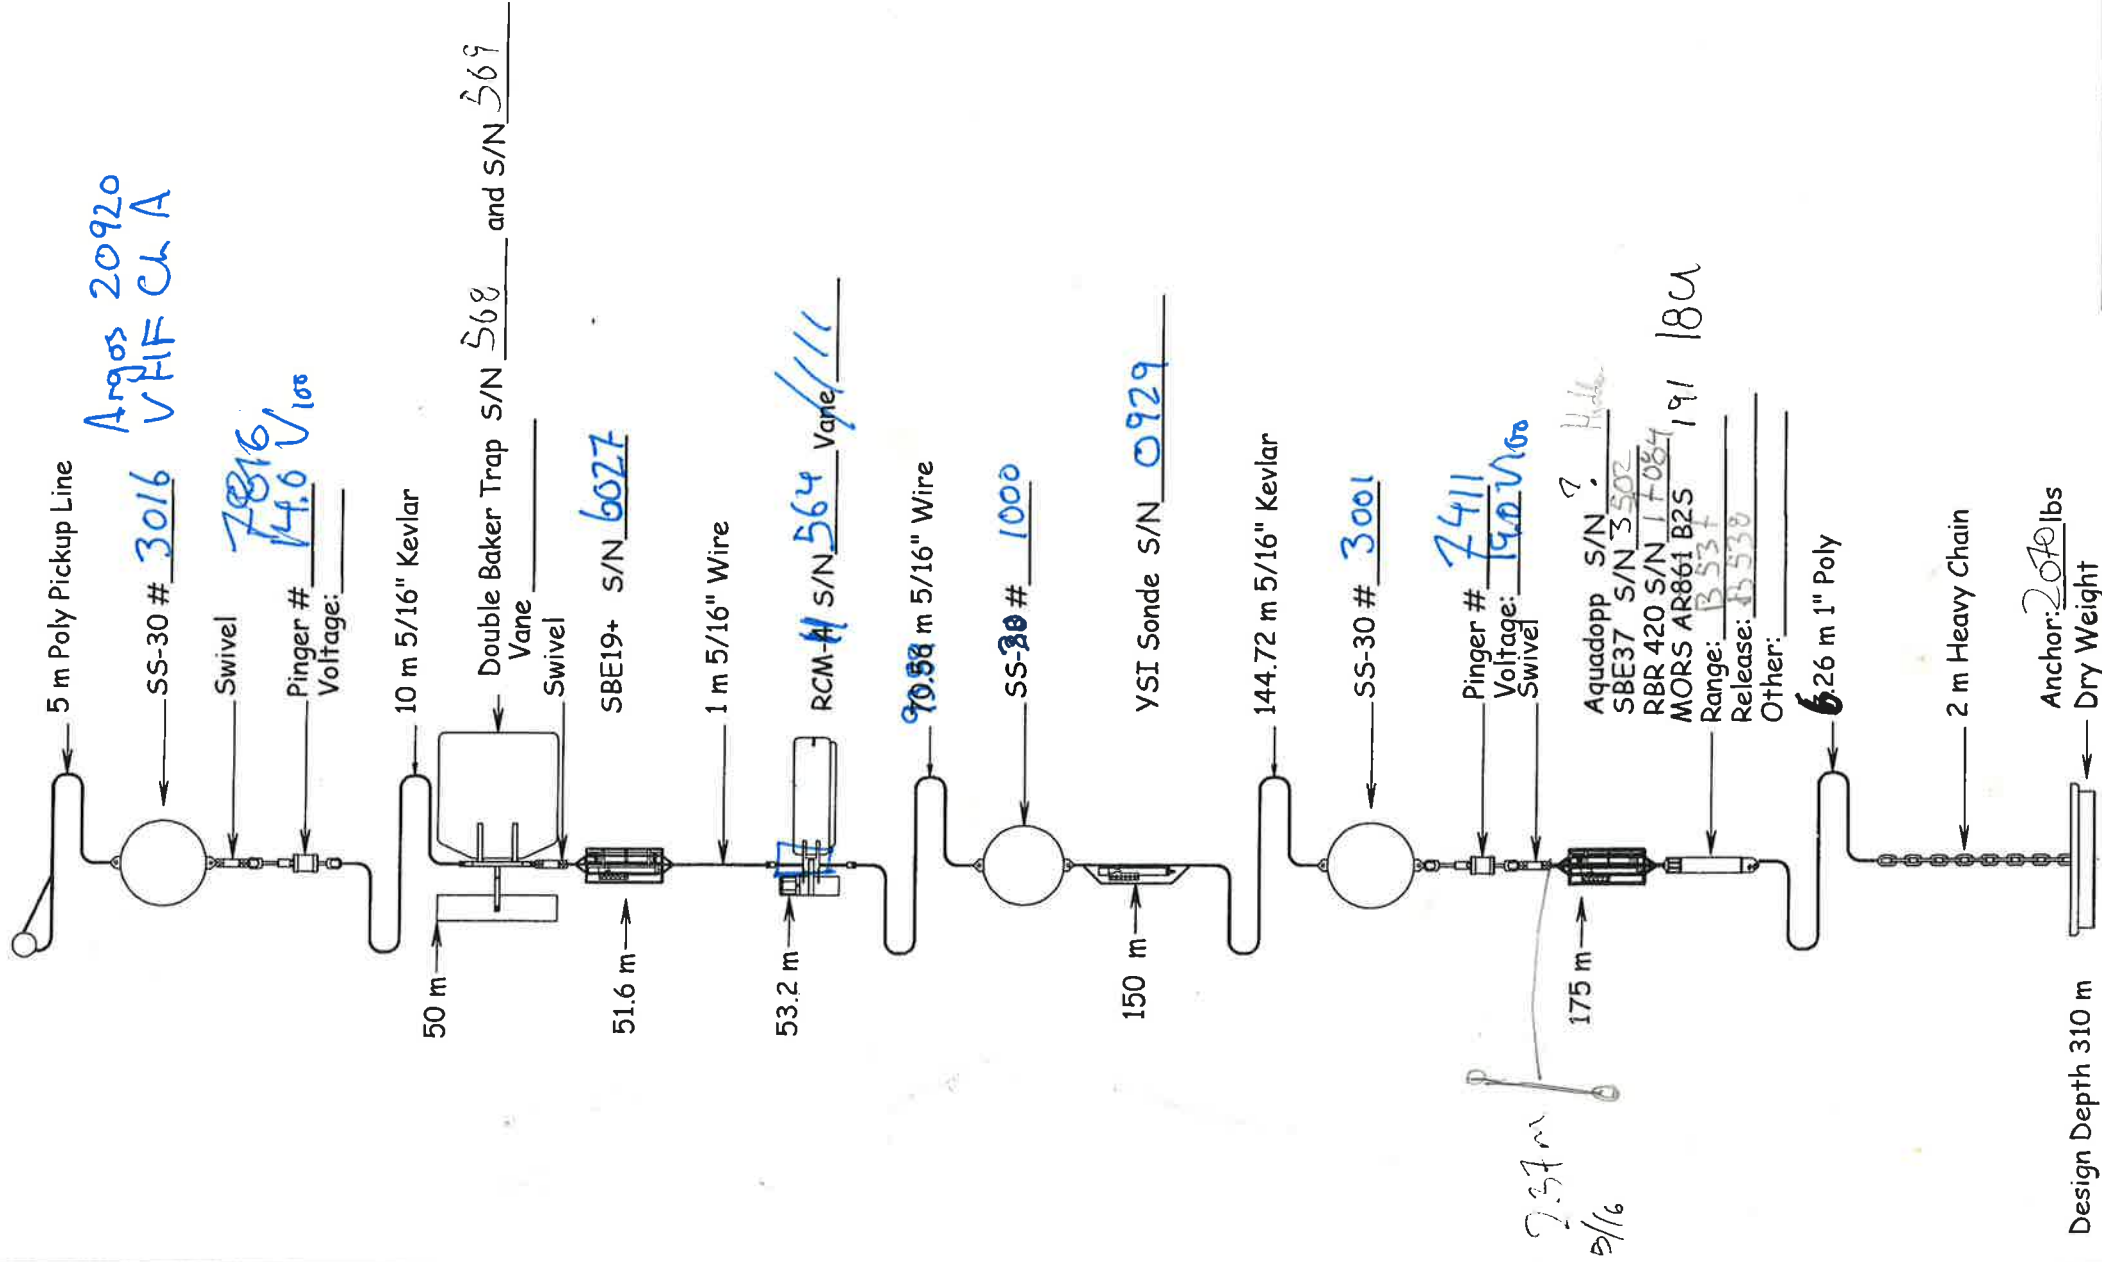

SoGS-~~F~~ F

Latitude: 49° 1.649

Longitude 123° 25.488

Time: 1706 UTC Date: 02/11/2009

Depth: 307 m

SoGS-F

Nov-09

310 m Design Depth

	Weight (kg)	Wet Weight (kg)	Length (m)	Inst. Height off btm (m)	Net Weight below float (m)	Depth (m)
3/4" Poly Pickup Line	1.45	-0.19	5.00	277.05		32.95
1/2" Shackle	0.37	0.32	0.05			
SS30 (WHH)	76	-161.00	1.11	272.00	-136.22	38.00
1/2" Shackle	0.37	0.32	0.05			
Pinger		4.10	0.62			
1/2" Shackle	0.37	0.32	0.05			
MillerC3	1.23	1.07	0.15			
1/2" Shackle	0.37	0.32	0.05			
1/2" Sling Link	0.25	0.22	0.08			
1/2" Shackle	0.37	0.32	0.05			
5/16" Kevlar	0.57	0.16	10.00	9.96		
1/2" Shackle	0.37	0.32	0.05			
Double Baker Trap	65	30.00	0.55	260.00		50.00
MillerC3	1.23	1.07	0.15			
1/2" Shackle	0.37	0.32	0.05			
1/2" Shackle	0.37	0.32	0.05			
SBE19+ with frame	18.70	12.25	1.15	258.37		51.63
1/2" Shackle	0.37	0.32	0.05			
5/16" Amgal	1.89	1.65	1.00			
1/2" SS Shackle	0.37	0.32	0.05			
1/2" SS Shackle	0.37	0.32	0.05			
RCM11	31.00	23.75	0.87	256.59		53.30
1/2" SS Shackle	0.37	0.32	0.05			
1/2" SS Shackle	0.37	0.32	0.05			
5/16" Amgal	23.08	20.20	93.89			
1/2" Shackle	0.37	0.32	0.05			
SS-28	64.00	-133.00	1.11		-64.78	
1/2" Shackle	0.37	0.32	0.05			
Sonde	15.77	13.07	1.00	160.00		150.00
1/2" Shackle	0.37	0.32	0.05			
1/2" Sling Link	0.25	0.22	0.08			
1/2" Shackle	0.37	0.32	0.05			
5/16" Kevlar	8.25	2.31	144.72	144.14 before stretch		
1/2" Shackle	0.37	0.32	0.05			
1/2" Shackle	0.37	0.32	0.05			
SS30 (WHH)	76	-161.00	1.11	14.63	41.89	295.37
1/2" Shackle	0.37	0.32	0.05			
Pinger		4.10	0.62			
1/2" Shackle	0.37	0.32	0.05			
MillerC3	1.23	1.07	0.15			
1/2" Shackle	0.37	0.32	0.05			
5/16" Amgal	2.20	1.92	2.37			
1/2" Shackle	0.37	0.32	0.05			
Aquadopp+µCat+RBR	15.33	10.52	0.90	10.00	Upwards looking	300.00
1/2" Shackle	0.37	0.32	0.05			
5/8" Shackle	0.76	0.67	0.06			
AR861 B2S	30.00	22.00	0.83	9.17		
1" Shackle	2.3	2.01				
1" Poly		-0.18	6.34			
7/8" Shackle	1.8	1.57				
1" Chain	38.64	33.71	2.00			

estimated Kevlar stretch

0.40%